

2205 Telehandlers < 6,0 m



Compact design meets performance: Telehandler 2205

The 2205 compact telehandler offers a unique combination of lift height, machine width and performance as well as a perfect interplay of powerful engine output and outstanding manoeuvrability. Stacking and transport work is fast and easy, even in the tightest of spaces. Precise work becomes child's play thanks to the sensitive work hydraulics.

- Innovative driver assistance system: Smart Handling
- Powerful hydrostatic drive system
- Precise and sensitive work hydraulics
- Over 5 meters of stacking height
- Superb all-round visibility



2205 Telehandlers < 6,0 m

Technical specifications

Operating data

Operating weight	4,200 kg
Turning radius Tyres	3,281 mm

Engine / Motor

Engine / Motor manufacturer	Perkins
Engine performance at 2,800 rpm	36.3 kW
Engine performance at 2,800 rpm	44.7 kW

Power transmission

Traction drive	Hydrostatic
Travel speed Stage 1:	7 km/h
Travel speed Stage 2:	20 km/h
Service brake central	Parking brake on all four wheels effective
Standard tires	10.5/80-18 AS ET0

Steering and operating hydraulics


Steering angle	2 x 40 °
Flow rate	70 l/min
Flow rate optional	106 l/min

Kinematics

Payload max.	2,200 kg
Lift height Pin height	5,471 mm



Dimensions

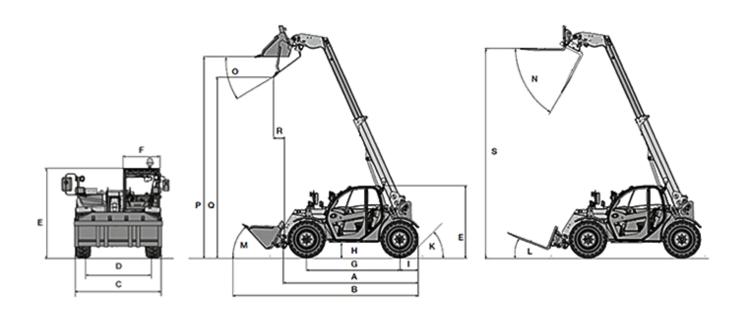

А	Length incl. tool frame	3,747 mm
В	Length with standard bucket	4,576 mm
С	Width max.	1,808 mm
D	Track width	1,530 mm
E	Height	1,950 mm
G	Wheelbase	2,449 mm
Н	Ground clearance	256 mm
Μ	Tipping angle Standard bucket below	41 °
Р	Overhead loading height	5,056 mm
Q	Dumping height	4,520 mm
R	Dump reach	293 mm



Information on suitable accessories can be found on our website.

The right to make changes is reserved in the interests of ongoing further developments. You can find more information on the engine power in the operator's manual. The actual power output figures may vary due to specific operating conditions.

Information on suitable accessories can be found on our website. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions. Subject to alterations and errors excepted. Applicable also to illustrations. Copyright © 2015 Kramer-Werke GmbH.